

**Uw CALCULATION**


1)	AREA of GLASS	0,30	m <sup>2</sup>
2)	GLASS Ug Value	1,10	W/m <sup>2</sup> .K
3)	AREA of PVC PR.	0,29	m <sup>2</sup>
4)	PVC PR. Uf Value	1,39	W/m <sup>2</sup> .K
5)	CIRCUMFERENCE of GLASS	2,33	m
	PSI of GLASS	0,04	W/m.K

(PSI FIX)


**WINDOW Uw VALUE**

**1,40** W/m<sup>2</sup>.K

Kiepramen / Fenêtres abattantes / Tilt windows






**Glass Combination**

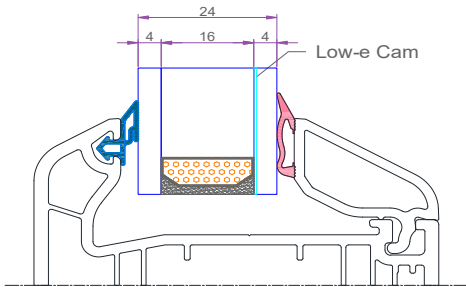

Ug= 1,1 W/m<sup>2</sup>.K

**Uf Calculation**

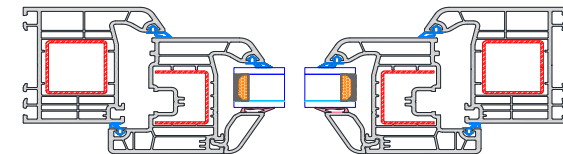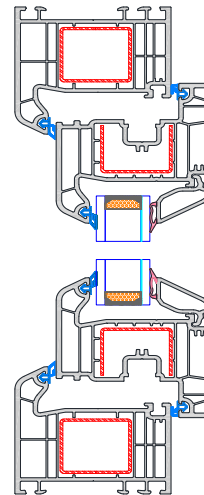

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

**\*\*Note\*\***  
 \*\*These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.  
 \*\*These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.