

Uw CALCULATION


1)	AREA of GLASS	1,92	m ²
2)	GLASS Ug Value	1,10	W/m ² .K
3)	AREA of PVC PR.	0,81	m ²
4)	PVC PR. Uf Value	1,38	W/m ² .K
5)	CIRCUMFERENCE of GLASS	7,89	m
	PSI of GLASS	0,04	W/m.K

(PSI FIX)


WINDOW Uw VALUE

1,30 W/m².K




Draai-Kiepramen 2 vleugels / Fenêtres oscillo battante double / Tilt & Turn windows 2 Sashes

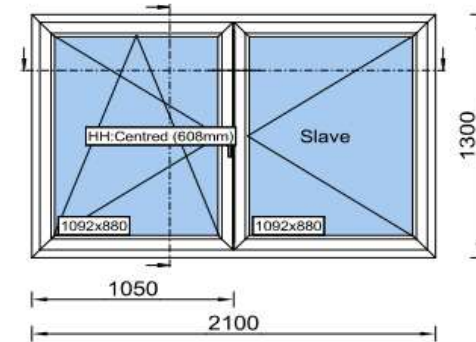

Glass Combination

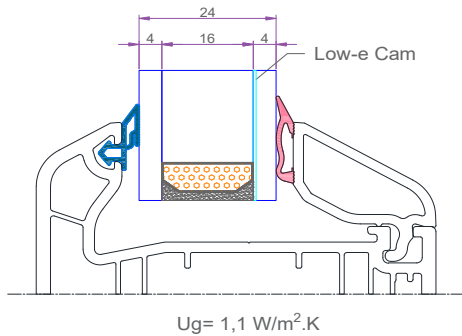

Uf Calculation

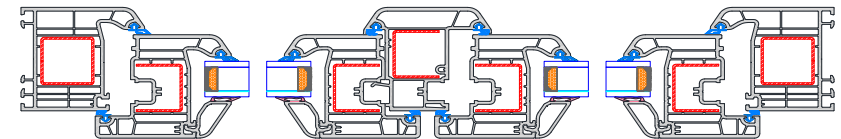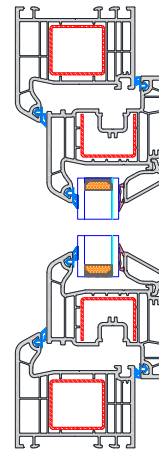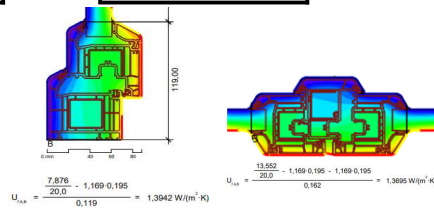

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

****Note****

**These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.

**These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.