

PVC Deur met sierpaneel en 5x glas - Porte PVC avec panneau décoratif et 5 fenêtres - PVC Single Door with 5 glasses

Ud CALCULATION


1)	AREA of GLASS	1,31	m ²
2)	GLASS Ug/Ud Value	1,60	W/m ² .K
3)	AREA of PVC PR.	0,75	m ²
4)	PVC PR. Uf Value	1,32	W/m ² .K
5)	CIRCUMFERENCE of GLASS/PANEL	5,10	m
	PSI of GLASS/PANEL	0,04	W/m.K

(PSI FIX)


WINDOW Ud VALUE

1,60 W/m².K

Pvc Enkele Deuren / Portes PVC - Pvc Single Doors



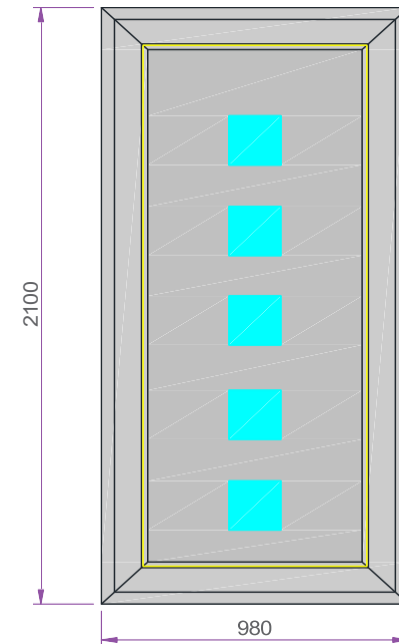


Glass/Panel Combination

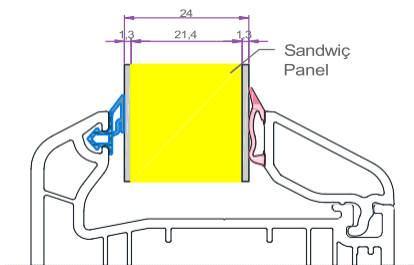

Ud = 1,6 W/m².K

Uf Calculation

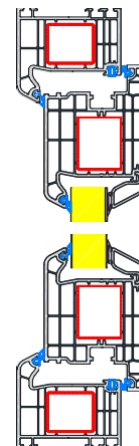

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

****Note***

**These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.

**These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.