


## PVC Deur met vol glas - Porte PVC complètement vitrée - PVC Single Door full glass


Pvc Enkele deuren / Portes PVC / Pvc Single Doors

### Ud CALCULATION

1)	AREA of GLASS	<b>1,31</b>	m <sup>2</sup>		
2)	GLASS Ug Value	<b>1,10</b>	W/m <sup>2</sup> .K		
<b>WINDOW Ud VALUE</b>					
<b>1,28</b> W/m <sup>2</sup> .K					
3)	AREA of PVC PR.	<b>0,75</b>	m <sup>2</sup>		
4)	PVC PR. Uf Value	<b>1,32</b>	W/m <sup>2</sup> .K		
5)	CIRCUMFERENCE of GLASS	<b>5,10</b>	m		
	PSI of GLASS	(P <sub>g</sub> /d <sub>g</sub> )X	W/m.K		



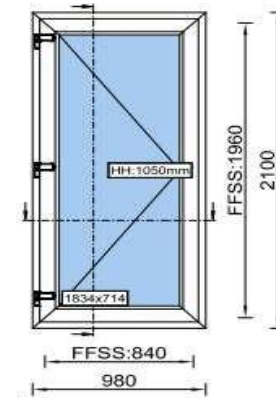


#### Glass Combination

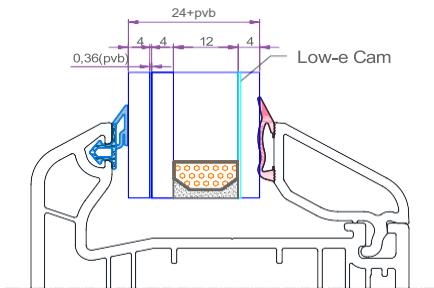

U<sub>g</sub> = 1,1 W/m<sup>2</sup>.K

#### Uf Calculation

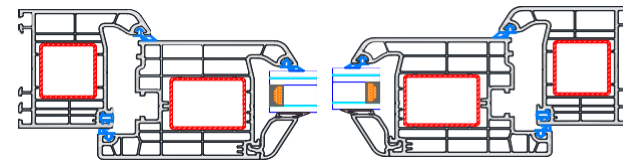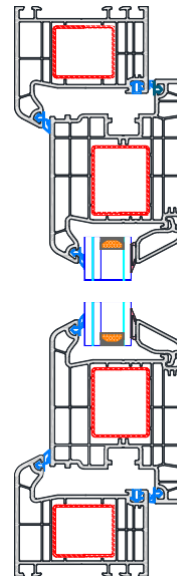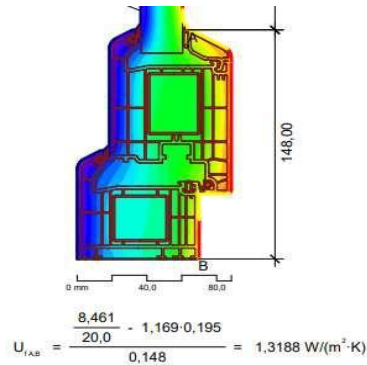

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

**\*\*Note**

\*\*These results are theoretical values obtained in a computer environment using the fixo program. They may differ from tests performed under real-world conditions.

\*\*These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.