

PVC Deur met vol paneel - Porte PVC avec panneau - PVC Single Doors full panel

Ud CALCULATION

- 1)
- 2)
- 3)
- 4)
- 5)


AREA of GLASS	1,31	m ²
GLASS Ug/Ud Value	1,60	W/m ² .K

Window Ud Value



1,60 W/m².K

AREA of PVC PR.	0,75	m ²
PVC PR. Uf Value	1,32	W/m ² .K


CIRCUMFERENCE of GLASS/PANEL	5,10	m
PSI of GLASS/PANEL	0,04	W/m.K



Pvc Enkele Deuren / Portes PVC / Pvc Single Doors

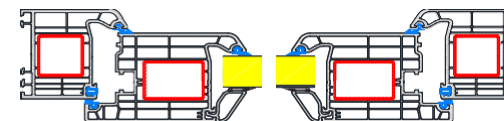
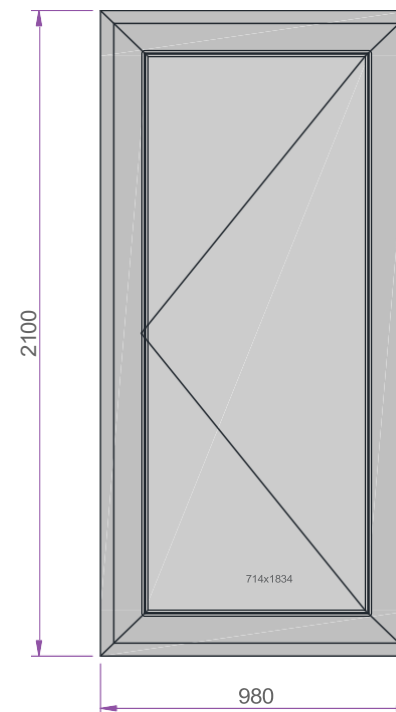


Glass/Panel Combination

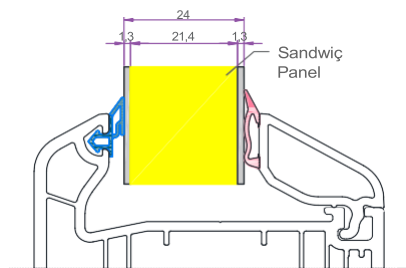

Ud = 1,6 W/m².K

Uf Calculation

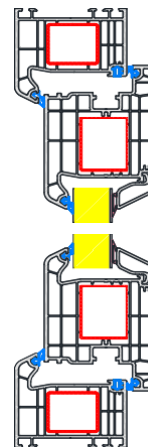

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

****Note**

**These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.

**These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.