

PVC Deur 1/2 glas - Porte PVC 1/2 vitrée - PVC Single Doors 1/2 glass

Uw CALCULATION



1)	AREA of GLASS	1,10	m ²
2)	GLASS Ug/Ud Value	1,35	W/m ² .K
3)	AREA of PVC PR.	0,75	m ²
4)	PVC PR. Uf Value	1,32	W/m ² .K
5)	CIRCUMFERENCE of GLASS/PANEL	6,02	m
	PSI of GLASS/PANEL	0,04	W/m.K

(PSI FIX)


WINDOW Uw VALUE

1,47 W/m².K


Pvc Enkele Deuren / Portes PVC - Pvc Single Doors

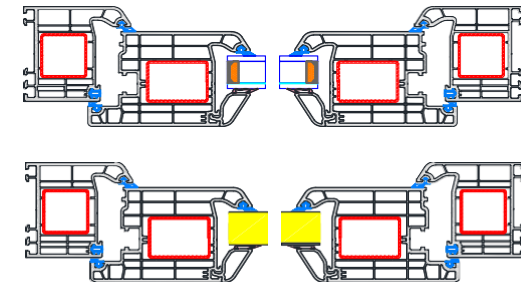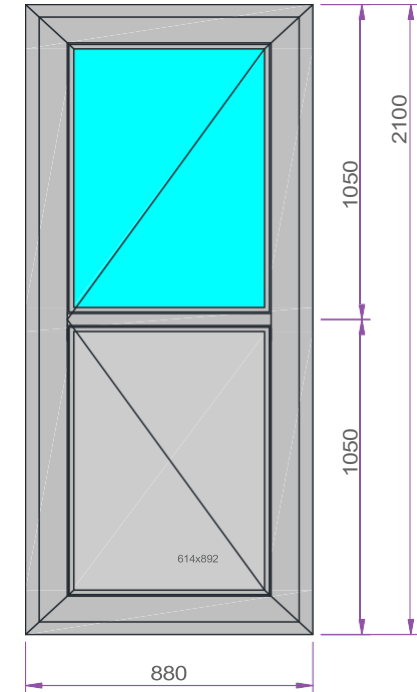

Glass/Panel Combination

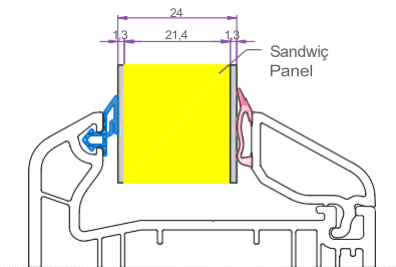


Ud= 1,6 W/m².K

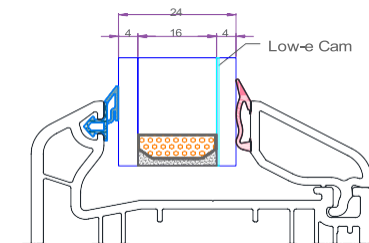

Ug= 1,1 W/m².K

Uf Calculation



Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

**Note*

**These results are theoretical values obtained in a computer environment using the fixo program. They may differ from tests performed under real-world conditions.

**These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.