


Uw CALCULATION

| | | | |
|----|------------------------|------|---------------------|
| 1) | AREA of GLASS | 0,92 | m ² |
| 2) | GLASS Ug Value | 1,10 | W/m ² .K |
| 3) | AREA of PVC PR. | 0,58 | m ² |
| 4) | PVC PR. Uf Value | 1,38 | W/m ² .K |
| 5) | CIRCUMFERENCE of GLASS | 5,49 | m |
| | PSI of GLASS | 0,04 | W/m.K |


(PSI FIX)

WINDOW Uw VALUE

1,36 W/m².K






Glass Combination

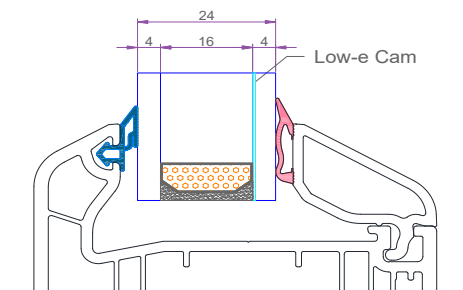

Ug = 1,1 W/m².K

Uf Calculation

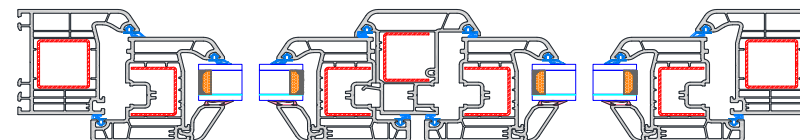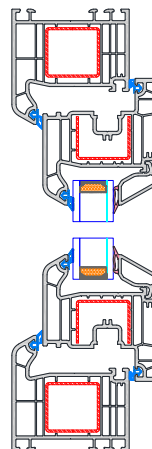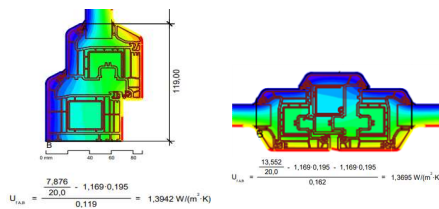

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

****Note****

**These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.

**These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.