

### Uw CALCULATION


1)	AREA of GLASS	0,63	m <sup>2</sup>
2)	GLASS Ug Value	1,10	W/m <sup>2</sup> .K
3)	AREA of PVC PR.	0,37	m <sup>2</sup>
4)	PVC PR. Uf Value	1,39	W/m <sup>2</sup> .K
5)	CIRCUMFERENCE of GLASS	3,17	m
	PSI of GLASS	0,04	W/m.K

(PSI FIX)


WINDOW Uw VALUE

**1,34** W/m<sup>2</sup>.K




Draai-Kiepramen 1 vleugel / Fenêtres oscillo battantes 1 ouvrant / Tilt & Turn windows 1 Sash

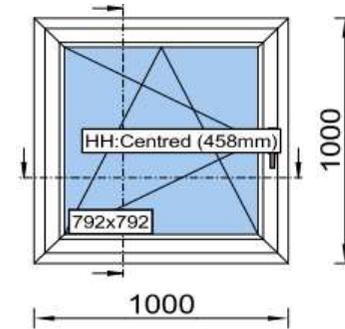

#### Glass Combination

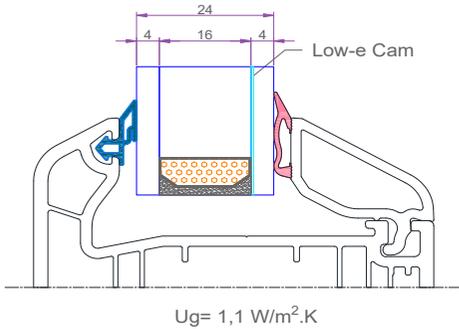

#### Uf Calculation

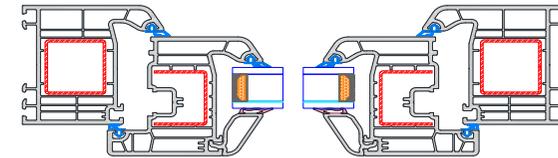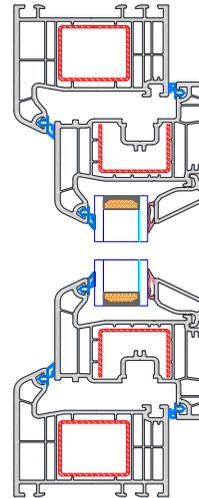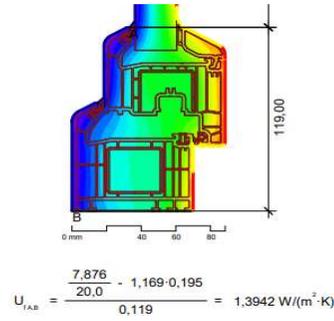

**\*\*Note\*\***  
 \*\*These results are theoretical values obtained in a computer environment using the fixo program. They may differ from tests performed under real-world conditions.  
 \*\*These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.