


Uw CALCULATION

1)	AREA of GLASS	4,30	m ²
2)	AREA of PVC PR.	1,10	W/m ² .K
3)	Area of PVC PR.	0,91	m ²
4)	PVC PR. Uf Value	1,61	W/m ² .K
5)	CIRCUMFERENCE of GLASS	12,15	m
	PSI of GLASS	0,04	W/m.K
		(PSI FIX)	


WINDOW Uw VALUE

1,28 W/m².K





Schuiframes 1-zijde schuivend – Fenêtres 1 côté coulissant – Single Sash Sliding

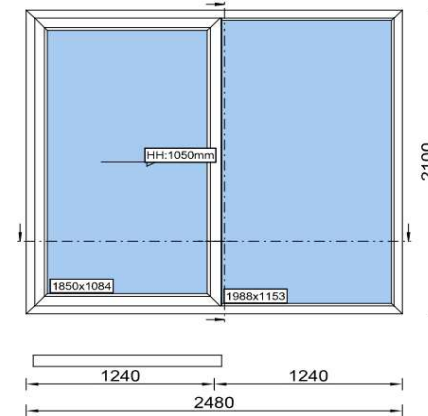

Glass Combination

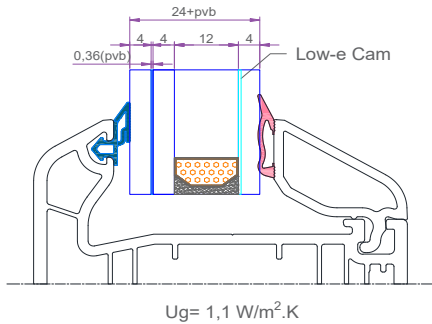

Uf Calculation

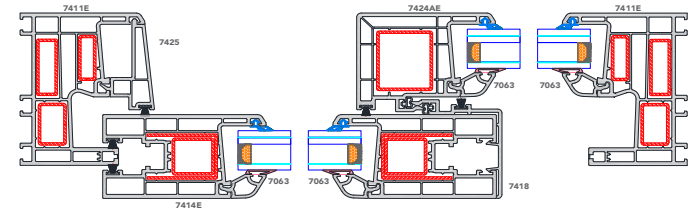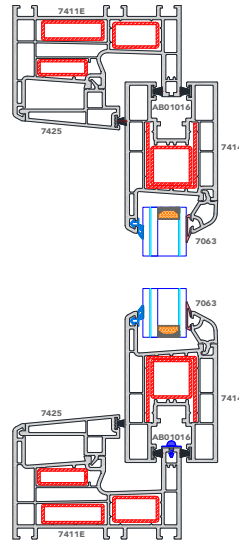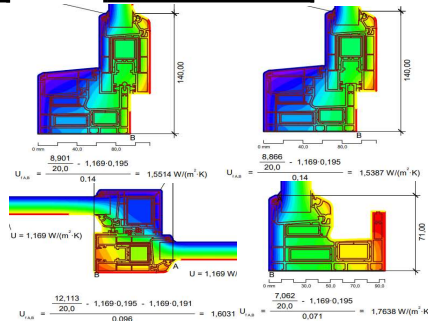

Thermische berekeningen werden uitgevoerd volgens EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Les valeurs thermiques ont été déterminées conformément aux normes EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

Thermal calculations were performed in accordance with EN ISO 10077-1:2006 & EN ISO 10077-2:2003.

****Note****
 **These results are theoretical values obtained in a computer environment using the flixo program. They may differ from tests performed under real-world conditions.
 **These calculations have been prepared for informational purposes only. Ramendepot accepts no responsibility for the results provided.